





CLASSIC™

Concrete Form

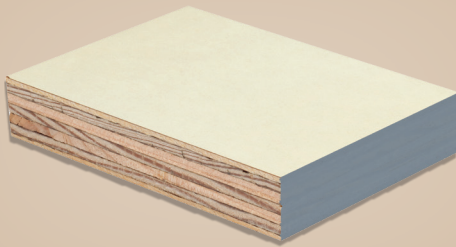

- Outperforms all competitive HDO panels using proprietary technology
- Highest flexibility in HDO applications
- Enhanced panel stability using "Swan Peel™" Technology
- Eliminates tiger striping/patch transfer
- Excellent for engineered systems



Swanson Group® provides the highest proven performance in conform panel solutions. Customers recognize our exceptional history of performance, exhibited in our panel solutions, including the first HDO/MDO "combi" panels in North America.

Swanson works directly with customers to establish relationships based upon market needs, panel design properties, overlay technologies, and application experience. We are now enhancing our capability to provide superior panel performance. **Swanson is manufacturing in a new state-of-the-art facility which is the most sophisticated overlay panel facility in North America.**

Product Description:

Classic™ is the work-horse, high-density overlaid plywood panel with excellent surface durability for gloss concrete finishes. It produces a smooth finish with minimal grain transfer and a high number of uses.

Panel Construction/Moisture Resistance:

Classic™ is constructed of proprietary, high-density overlay on dense proprietary hardwood faced plywood with Douglas Fir/Hemlock inner plys using Swan Peel™ Technology. It is produced with a one-step layup, has a waterproof glue bond and meets APA PS 1-09. All Swanson products are made in the USA.


Working Faces/Treatment:

- Classic™ is available with one or two working faces. Panels with a single working face are provided with an HDO backer sheet.
- Gloss level of concrete surface: gloss
- Wood grain transfer to concrete surface: slight
- Wood defect transfer to concrete: minimal—no football patches
- Sugaring: none
- Maintenance: limited

Working Edges/Treatment:

- Factory sawn and sealed with special gray, styrene acrylic sealer
- Seal all exposed wood (edges and holes) with Edge-Flex 645 by Nox-Crete, Swanson Form Seal by Willamette Valley Co. or equivalent to prevent concrete staining from the wood sugars

Alkalinity Resistance After Chemical Exposure

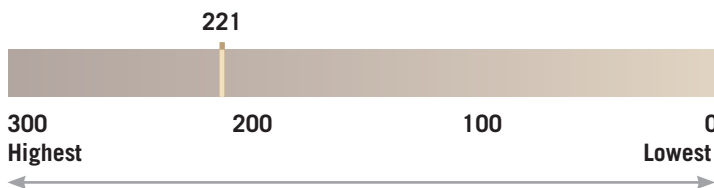

The Abrasion and Chemical Resistance Test reflects the expected panel life in the field. The higher the index number, the more resistant to alkalinity/abrasion.

Structural/Load Performance Summary

Classic™ is available in the equivalent of Struct 1 or Class 1. Allowable pressure $\ell/270 \frac{3}{4}$ " @ 12" OC (face gain across supports): Struct 1 - 1105 PSF, Class 1 - 885 PSF

Typical Pour Ranges:

- Engineered systems: up to 150 pours
- Gang forms: up to 100 pours
- Job built: up to 75 pours

- Pour ranges are not guaranteed because the number of pours will vary due to jobsite handling and panel maintenance, vertical or horizontal use, form release agent, concrete mix design/strength, alkalinity, pour rate and other factors

Release Coating:

- Release agent: not factory treated
- Coating required: light before first and each subsequent pour
- Recommended release agent: Nox-Crete Release Agent #10 (oil based), Bio-Nox (water based and readily biodegradable) or equivalent.
- Special applications or use requirements may dictate the need for alternative release agents. Contact Swanson Group Sales, Nox-Crete or alternative manufacturer for more information.

Other Applications:

- Pallets, bins, totes, crates, reels
- Tanks, vats, freezer liners, storage lockers, trunks and shelving
- Animal enclosures, farm buildings & equipment

Limitations:

Do not exceed design limitations imposed by the load span table. Conform to concrete form design procedures based on American Concrete Institute (ACI) standard 347-04. Release agents are required. Do not employ used concrete form for structural applications. Do not coat or laminate this panel without surface preparation.

Thicknesses & Sizes:

Classic™ is available in 1/2", 5/8", 3/4" & 1-1/8". Standard panel sizes are 4' X 8'. Please inquire for availability and specific 10' properties. Non standard thicknesses, widths and lengths meeting volume requirements are available.

Technical Data Applicable Standards

All panels are manufactured by Swanson Group® per product standard PS1-09. This standard is available at www.apawood.org.

Physical Properties	3/8" to 1/2"	5/8" to 1-1/8"
Check Resistance – APA test #6	2.3 mm	2.3 mm
Moisture Resistance (Cobb) 8-hour Soak	2.78 g/sq. ft.	2.78 g/sq. ft.
Alkalinity Resistance After Chemical Exposure D/T	221	221
Formaldehyde Level ASTM E-1333	< 0.01 parts/million	

Panel Tolerances	3/8" to 3/4"	1" & Greater
Thickness Tolerance	+/- 1/32" (.031")	+/- 5%
Length & Width Tolerance	+0, -1/16" (.062")	+0, -1/16" (.062")
Squareness	1/16" (.062")	1/16" (.062")
Straightness	1/16" (.062")	1/16" (.062")

Note: All tolerances and specifications apply at the time of manufacture.
Note: Product averages vary for individual thicknesses.

Standard Packaging:

Thickness	Classic™ 1 Side/HDO Back Average Weight* lbs./Panel	Classic™ 2 Sides, Average Weight* lbs./Panel	Pieces per Unit
1/2"	53.7	55.1	66
5/8"	73.1	74.5	50
3/4"	79.3	80.7	44
1-1/8"	111.3	112.7	30

*Average product weights may vary +/- 10%

Product Grade: Standard product is shipped on grade only. Special product is shipped allowing up to 10% total good one side (G1S) and/or Shop, identified & priced separately. Shipments of G1S and shop may be available

Stress and Load Span Tables: These stress and load span tables simulate actual wet form conditions. Dry load span values are overstated and should not be used. Canadian (COFI) design values for Douglas Fir are 25% higher than APA.

Stress Tables: Tables 1 & 2 herein are based on standard APA and commercial standards PS-1 criteria.

Stress Table – Dry, Working Stress Wet Design Capacities – 4' X 8' Only					
Nominal Thickness	Struct 1		Class 1		Wet Adjust Factor
	1/2"	3/4"	1/2"	3/4"	
Number of Plies	5	7	5	7	
Table 1: Face Grain <i>Perpendicular</i> to Supports ¹					
Bending Stiffness ¹	142,562	429,452	142,310	423,697	.85
Bending Resistance ²	525.6	1,034.7	524.6	1,024.8	.75
Planar Shear ³	277.8	363.3	207.6	275.0	.75
Table 2: Face Grain <i>Parallel</i> to Supports ¹					
Bending Stiffness ¹	56,820	247,726	48,022	208,310	.85
Bending Resistance ²	266.6	667.7	194.8	486.9	.75
Planar Shear ³	159.2	311.1	159.7	311.2	.75

¹Bending Stiffness = EI* (lb-in²/ft); ²Bending Resistance = M or F_sS (lb-in/ft); ³Planar Shear Capacity: V or F_vlb/Q (lb/ft). There is no DOL (Duration of Load) or experience factor applied to EI, FbS and Fsb/Q.

Load Span Tables: Tables 3 through 6 are based on standard APA and PS-1 criteria.

Struct 1 LOAD SPAN TABLES – WET CONDITIONS								
Recommended Maximum PSF on Struct 1 Panels or Equivalent (V405)								
Table 3: Face Grain <i>Perpendicular</i> to Supports ¹								
Support Spacing	Plywood Thickness – Allowable Pressure (PSF)							
	1/2"		5/8"		3/4"		1-1/8"	
(in.)	ℓ/360	ℓ/270	ℓ/360	ℓ/270	ℓ/360	ℓ/270	ℓ/360	ℓ/270
8"	1,405	1,405	1,970	1,970	2,050	2,050	3,095	3,095
12"	485	620	745	875	1,060	1,105	1,845	1,845
16"	205	275	350	450	505	575	1,335	1,335
19.2"	120	160	195	265	305	405	1,015	1,015
24"			100	135	160	210	625	650
Table 4: Face Grain <i>Parallel</i> to Supports ¹								
Support Spacing	Plywood Thickness – Allowable Pressure (PSF)							
	1/2"		5/8"		3/4"		1-1/8"	
(in.)	ℓ/360	ℓ/270	ℓ/360	ℓ/270	ℓ/360	ℓ/270	ℓ/360	ℓ/270
8"	550	640	1,115	1,115	1,685	1,685	2,525	2,525
12"	155	210	430	575	715	810	1,560	1,560
16"			180	240	310	415	1,000	1,000
19.2"			125	170	220	250	555	555
24"					110	150	355	355

Notes: ¹Plywood continuous across two or more spans. These are total loads (weight of panel should be considered in horizontal applications). DOL (Duration of Load) 1.25 and experience factor of 1.30 used in load tables.

Class 1 LOAD SPAN TABLES – WET CONDITIONS								
Recommended Maximum PSF on Class 1 Panels or Equivalent (V412)								
Table 5: Face Grain <i>Perpendicular</i> to Supports ¹								
Support Spacing	Plywood Thickness – Allowable Pressure (PSF)							
	1/2"		5/8"		3/4"		1-1/8"	
(in.)	ℓ/360	ℓ/270	ℓ/360	ℓ/270	ℓ/360	ℓ/270	ℓ/360	ℓ/270
8"	1,000	1,000	1,320	1,320	1,580	1,580	2,230	2,230
12"	455	495	710	710	885	885	1,320	1,320
16"	195	260	325	400	445	505	1,000	1,000
19.2"	110	150	190	255	270	350	740	820
24"			100	130	145	190	425	530



Swanson Group® is a registered trademark of Swanson Group. Specifications subject to change without notice. Effective: 1/2019

Table 6: Face Grain <i>Parallel</i> to Supports ¹								
Support Spacing	Plywood Thickness – Allowable Pressure (PSF)							
	1/2"		5/8"		3/4"		1-1/8"	
(in.)	ℓ/360	ℓ/270	ℓ/360	ℓ/270	ℓ/360	ℓ/270	ℓ/360	ℓ/270
8"	392	434	747	747	1,175	1,175	1,819	1,819
12"	145	167	409	466	596	648	1,167	1,167
16"			167	213	273	364	749	749
19.2"			121	163	194	216	404	448
24"					100	135	241	289

Notes: ¹Plywood continuous across two or more spans These are total loads (weight of panel should be considered in horizontal applications) DOL (Duration of Load) 1.25 and experience factor of 1.30 used in load tables.

Form Panel Thickness: For more detailed design information, refer to APA publication "Design/Construction Guide: Concrete Forming V345" and to American Concrete Institute publication "Formwork for Concrete."

Edge Support: In high moisture/sustained load conditions, edges may have a greater deflection than the panel center and may exceed calculated deflection.

Suitability for Use and Warranty: Nothing herein constitutes a warranty express or implied, including any warranty of merchantability or fitness for use, nor is protection from any law or patent to be inferred. The exclusive remedy for all claims is replacement of materials. Contact the sales office for a copy of the complete Swanson Terms and Conditions of Sale.

Warehouse Storage and Handling

- Store in a dry, clean, well-ventilated area indoors
- Avoid temperature and moisture extremes. Allow panels to equalize for 72 hours or more before use
- Pieces must not be stored in contact with the ground
- Limit the stacking height to four or five units. Separate units with clean, dry spacers of uniform thickness, aligned carefully. Use three spacers for panels 8' long, four or five spacers for longer panels

Jobsite Care and Handling

- Product preparation:** Swanson Classic™ panels are not factory release coated. Lightly coat panels prior to first use and each subsequent use with Nox-Crete Release Agent #10, Bio-Nox or equivalent.
- Pouring and Vibrating:** Follow the rate of pour to reduce excessive pressure that can cause panel damage. Use rubber tipped vibrators and exercise care not to damage form faces.
- Stripping:** Prolong panel life with proper stripping and handling. Use wood wedges, rather than metal bars or pries, to separate the form from the concrete. Form panels must be lowered, not thrown or dropped, to avoid face and edge damage.
- Cleaning:** Storage and edge sealing—Clean panels after each use, employing burlap or flat, non-scratching tools such as plastic or wood scrapers. Reseal cut edges or exposed wood at holes or openings with two coats of a styrene acrylic sealer. Stack panels flat and remove fasteners to prevent damage and warping. Store panels in a protected area and avoid direct sunlight.
- Surface Repairs:** Remove form release agent, concrete & loose wood/overlay debris. Sand the damaged surface with coarse (80 grit) disc or paper. For architectural concrete, use fine (120 grit) for the damaged perimeter area. Clean all sanding debris from the repair area. Apply: W.R. Meadows - Rezi-Weld Gel Paste State, Euclid - Euco #620 Gel Epoxy System, or Sika - Sikadur AnchorFix. Use the Rezi-Weld Gel Paste State when the air temp is above 60° F, or the Euco #620 Gel or Sikadur AnchorFix-4 when the air temp is above 33° F. Scrape off the excess repair material using a putty knife. Allow repair material to cure for 24 hours (48 hours in cold weather) before sanding, then feather sand the area.

Environmental Impact

- Swanson Group uses process by-products to produce energy
- Swanson products are renewable, biodegradable and recyclable

Warnings: This product contains 0.03 parts/million of residual formaldehyde from manufacturing. This product will generate wood dust from sawing, sanding, or shaping. Material safety data sheets are available on Swanson's website at www.swansongroup.biz and upon request.

Structural panels (PS-1) are exempt from California Air Resources Board regulations, however, this product is below CARB limits for all uses.

There's more than one reason Swanson Group® is #1 in the concrete forming industry. Find out more at www.swansongroup.biz



Swanson Group Sales
1651 S F. Street
Springfield, OR 97477
Email: overlays@swansongroup.biz

Toll Free: 800-331-0831
Local: 541-832-1121
Fax: 541-832-1139
www.swansongroup.biz